


## **20' Standard Steel Container**

20' standard steel containers are closed weather-tight containers that are suitable for any general cargo.


<b><u>Description</u></b>	<b><u>Metric</u></b>	<b><u>Imperial (U.S.)</u></b>
Cubic Capacity	33.200 cubic meters	1,100 cubic feet
Payload (Weight)	21,850 kg - 28,160 kg	48,171 lb - 62,082 lb
Tare Weight	2,150 kg - 2,220 kg	4,740 lb - 4,894 lb
Max Gross Weight	24,000 kg - 30,480 kg	52,911 lb - 67,197 lb
Internal Length	5.898 m	19'4"
Internal Width	2.352 m	7'9"
Internal Height	2.392 m	7'10"
External Length	6.058 m	19'10 1/2"
External Width	2.438 m	8'0"
External Height	2.591 m	8'6"
Door Opening Width	2.340 m	7'8"
Door Opening Height	2.280 m	7'6"
Lashing Rings	Five on each top and bottom rails, capacity 2,000 kg; Three on each corner post, capacity 1,500 kg	

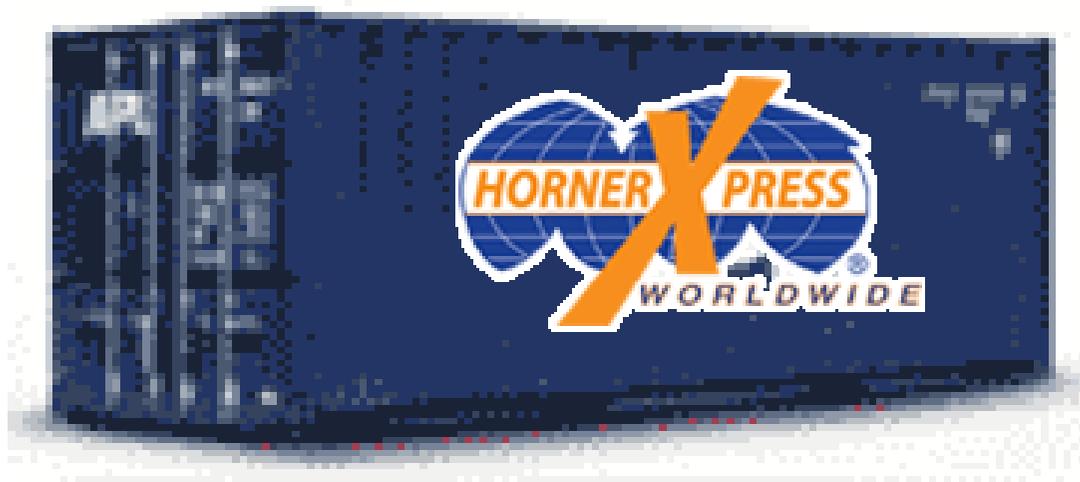

## 40' Standard Steel Container

40' standard steel containers are closed weather-tight containers that are suitable for any general cargo.

Description	Metric	Imperial (U.S.)
Cubic Capacity	67.700 cubic meters	2,391 cubic feet
Payload (Weight)	26,760 kg - 28,760 kg	58,996 lb - 63,405 lb
Tare Weight	3,720 kg - 3,740 kg	8,201 lb - 8,245 lb
Max Gross Weight	30,480 kg - 32,500 kg	67,197 lb - 71,650 lb
Internal Length	12.032 m	39'6"
Internal Width	2.352 m	7'9"
Internal Height	2.392 m	7'10"
External Length	12.192 m	40'0"
External Width	2.438 m	8'0"
External Height	2.591 m	8'6"
Door Opening Width	2.340 m	7'8"
Door Opening Height	2.280 m	7'6"
Lashing Rings	Ten on each top and bottom rails, capacity 2,000 kg; Three on each corner post, capacity 1,500 kg	

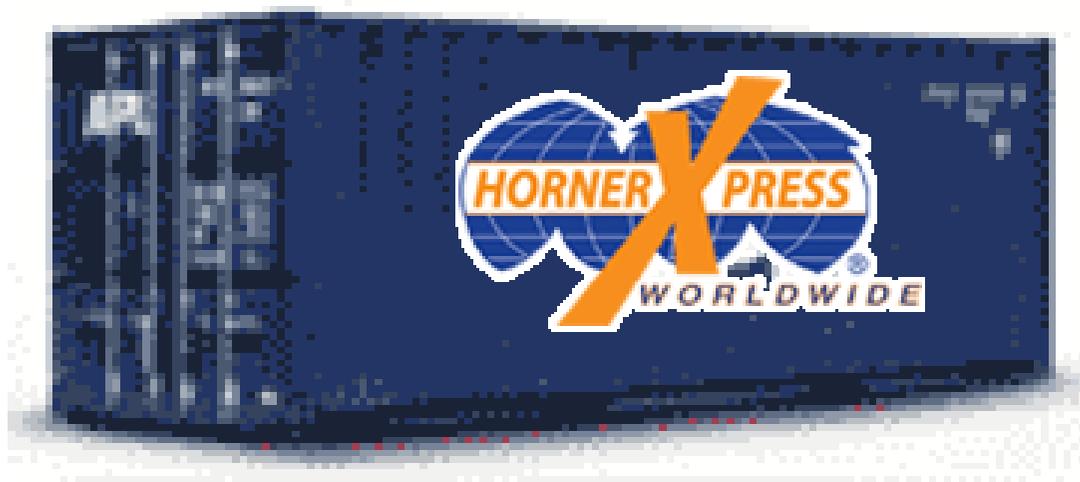

## **40' High Cube Steel Container**

40' high cube containers are suitable for all general cargo transportation. They are almost identical to the 40' standard containers, except that they have more cubic capacity as they are one foot taller.

<b>Description</b>	<b>Metric</b>	<b>Imperial (U.S.)</b>
Cubic Capacity	76.400 cubic meters	2,700 cubic feet
Payload (Weight)	26,750 kg - 28,760 kg	58,974 lb - 62,942 lb
Tare Weight	3,730 kg - 3,950 kg	8,223 lb - 8,708 lb
Max Gross Weight	30,480 kg - 32,500 kg	67,197 lb - 71,650 lb
Internal Length	12.033 m	39'6"
Internal Width	2.352 m	7'9"
Internal Height	2.698 m	8'10"
External Length	12.192 m	40'0"
External Width	2.438 m	8'0"
External Height	2.896 m	9'6"
Door Opening Width	2.340 m	7'8"
Door Opening Height	2.585 m	8'6"
Lashing Rings	Ten on each top and bottom rails, capacity 2,000 kg; Three on each corner post, capacity 1,500 kg	